

SUBWOOFERS

SUB 12 DUAL


Technical Sheet



SPECIFICATIONS

Nominal power	300W RMS
Maximum power	600W
Sensitivity	88dB
Nom. impedance	4 Ω + 4 Ω
Cone	Polypropylene
Surround	Butyl
VC diameter	50mm 2"
Net weight	5.5kg

FREQUENCY RESPONSE/IMPEDANCE

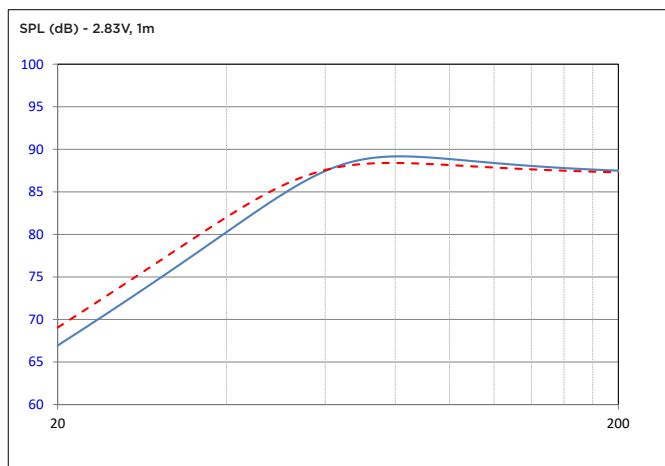

PARAMETERS

Rdc	3.5 Ω + 3.5 Ω
Fs	24Hz
Mms	150g
Cms	0.26mm/N
Vas	81L
Qts	0.573
Qes	0.641
Qms	5.34
Bxl	8.5 N/A
Sd	471cm ²

MECHANICAL DRAWING

