



Bentley & VW Phaeton(2010~2018) VW RNS510 Radio WIRING DIAGRAM---LDS-BLY80-MINI

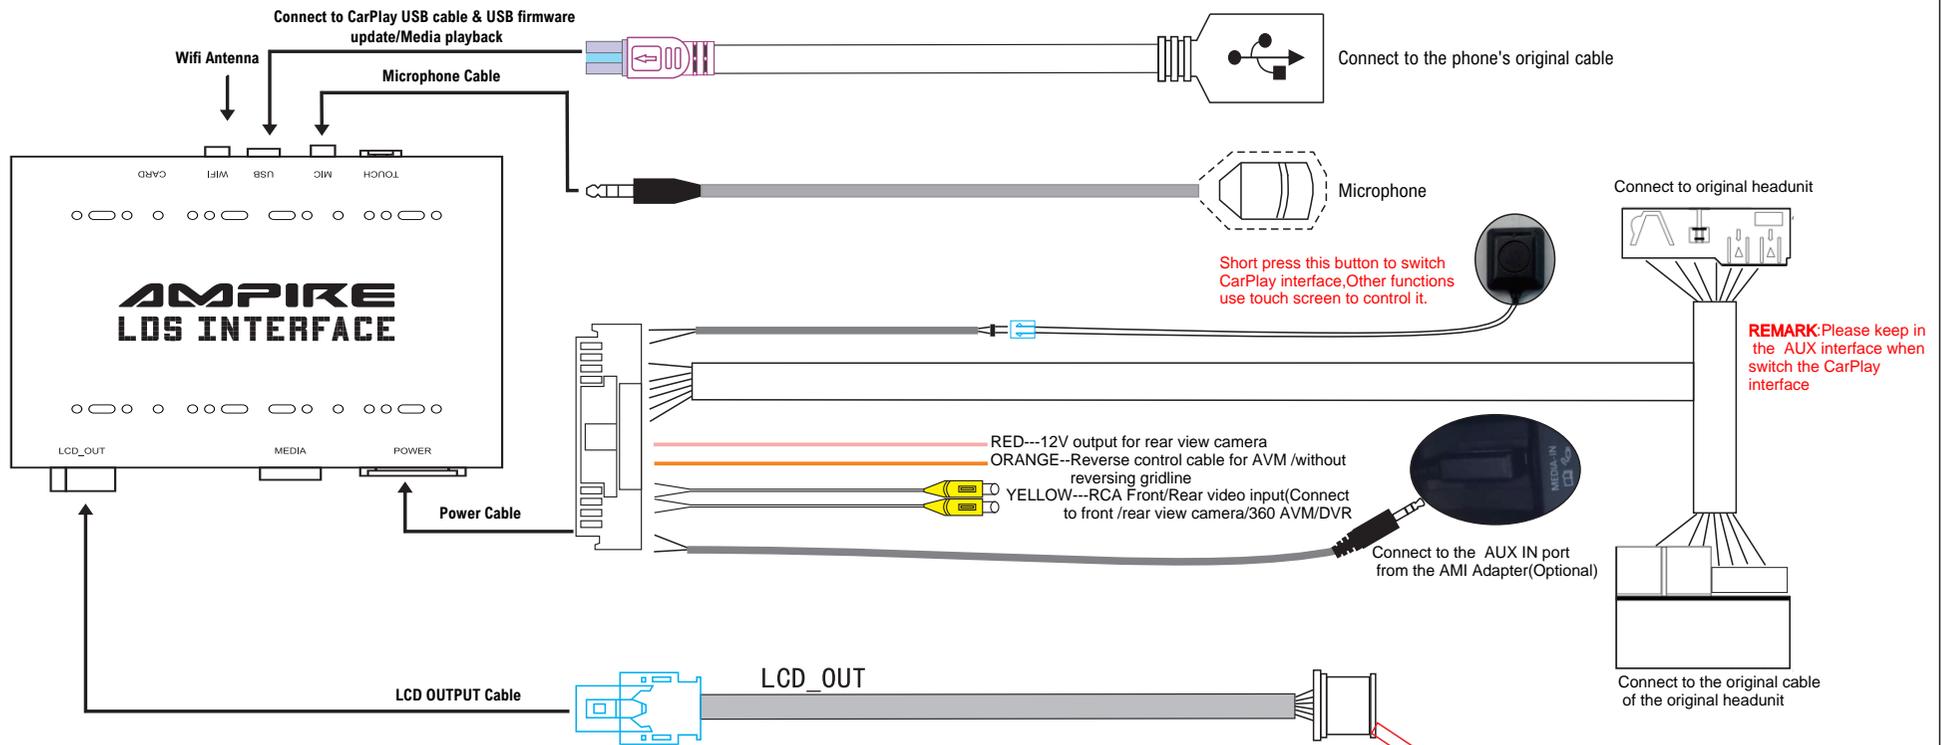


DIP SWITCH SETTING

(After changing the dip code, press "reset" or power-on again)



PIN1	OFF/ON	NG/NG
PIN2	OFF/ON	NG / Touch point coordinate correction, and then turn "OFF"
PIN3	OFF/ON	NG / Bentley & Phaeton&RNS510 Radio
PIN4	OFF/ON	NG/NG
PIN5	OFF/ON	NG/NG
PIN6	OFF/ON	NG/NG
PIN7	OFF/ON	NG/NG
PIN8	OFF/ON	NG/NG



1). After disassembling the panel, cover and the screws of the original engine, install the upper column in the position specified in the figure.



2). Insert the 50PIN and on the switching board with the original headunit, fix the switching board with the screws removed from the original headunit, and then insert the LVDS line and pay attention to the outlet position. The movement and upper cover are then installed, as shown above.

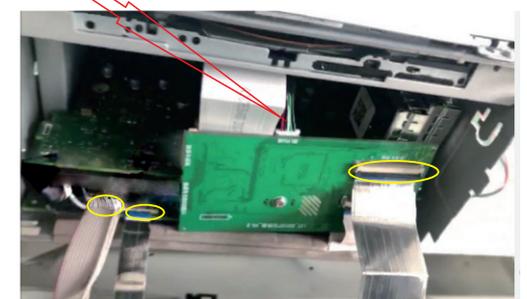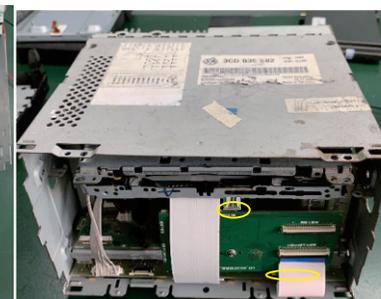

3). Insert the three lines of the original headunit's panel (50PIN FPC /12PIN/SD card cable). Then restore the panel of the headunit.

Remark: For the Bentley with original DAB function, LDS interface can also work with switch button.