



Audi Q3 WIRING DIAGRAM---LDS-Q3-CP

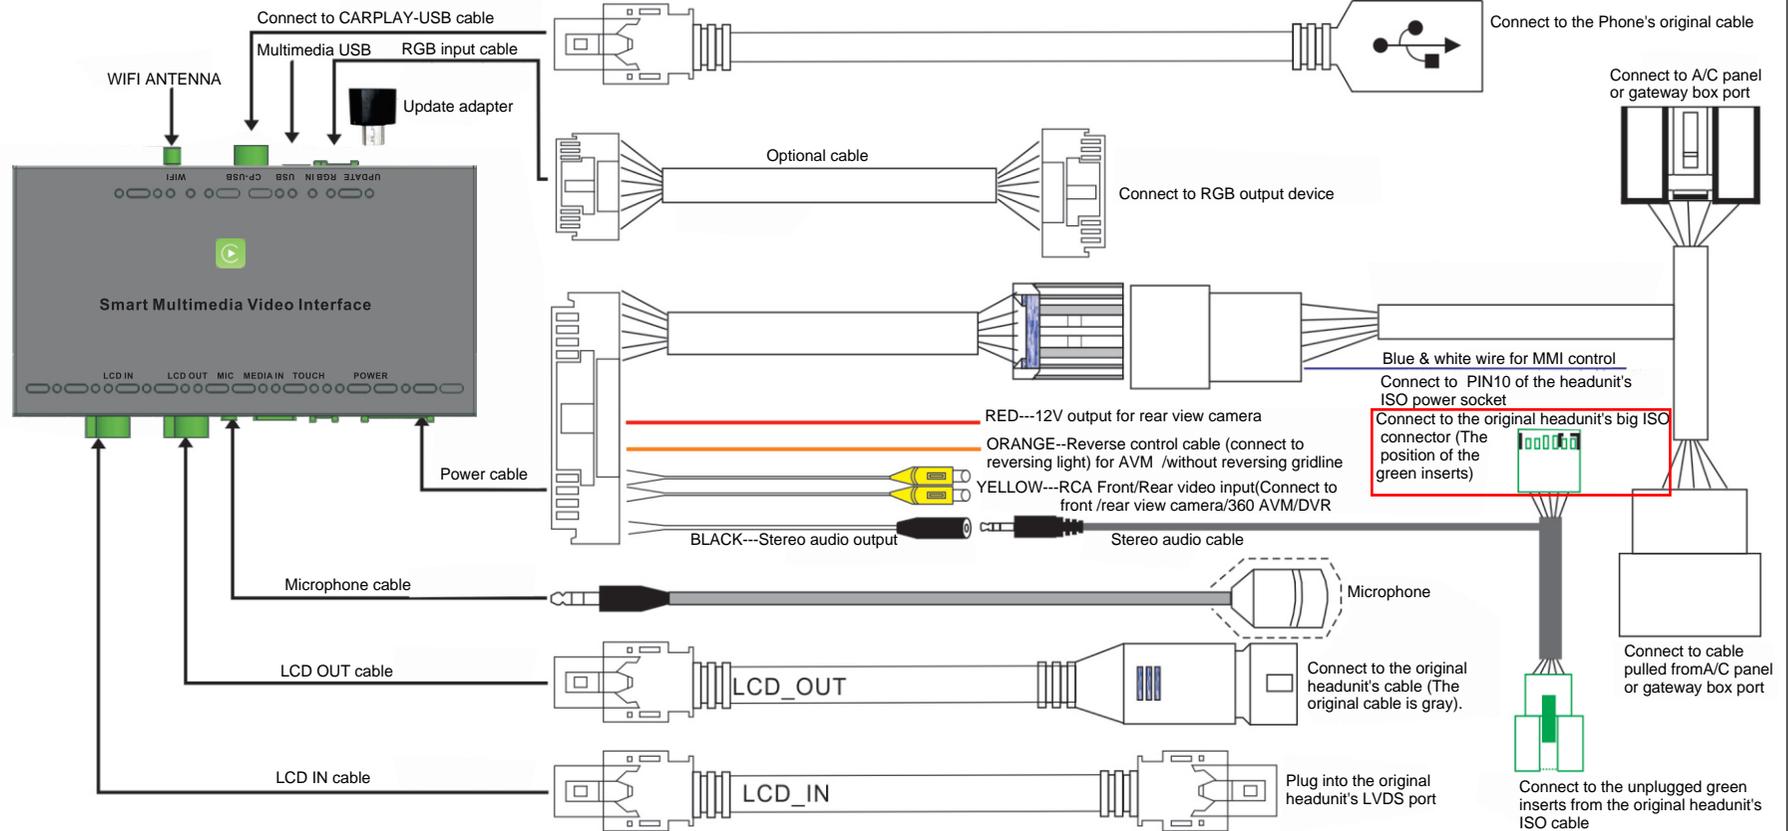

DIP SWITCH SETTING

(After changing the dip code,press "reset" or power-on again)

PIN 1	PIN 2	PIN 3	PIN 5	CAR MODEL
ON	ON	OFF	OFF	High-end 7" A1/Q3 --- CAN1 connect to gateway box's (Under the steering wheel)pin5&15 or to A/C panel's beige socket's pin12&13
OFF	ON	OFF	OFF	Low-end 6.5" A1/Q3 --- CAN1 connect to gateway box's (Under the steering wheel)pin5&15 or to A/C panel's beige socket's pin12&13
OFF	ON	ON	ON	Lamando/Low-end Q3---CAN1 connect to ISO socket's Gra socket in6&12 CAN2 connect to in1&7



REMARK:Please keep in the AUX interface when switch the CarPlay interface (If there is no AUX status,pls activate it by computer)



- 1) For A1/Q3 control panel,long press and hold Voice control button to switch MENU,long press Voice control button again,exit the MENU.
- 2)Short press "Voice control" button to open "Siri".
- 3)Steering wheel Roller to control up/down/ok.

PIN 4	OFF/ON	Reversing gridline/Enable 360 panoramic
PIN 6	OFF/ON	Rear view camera CVBS input / RGB input
PIN 7	OFF/ON	NG/Touch point coordinate correction,and turn to "OFF"
PIN 8	OFF/ON	Aftermarket rear view CAM/Original rear view CAM