


Vehicle-specific camera

VSC-E-FO05


Delivery content

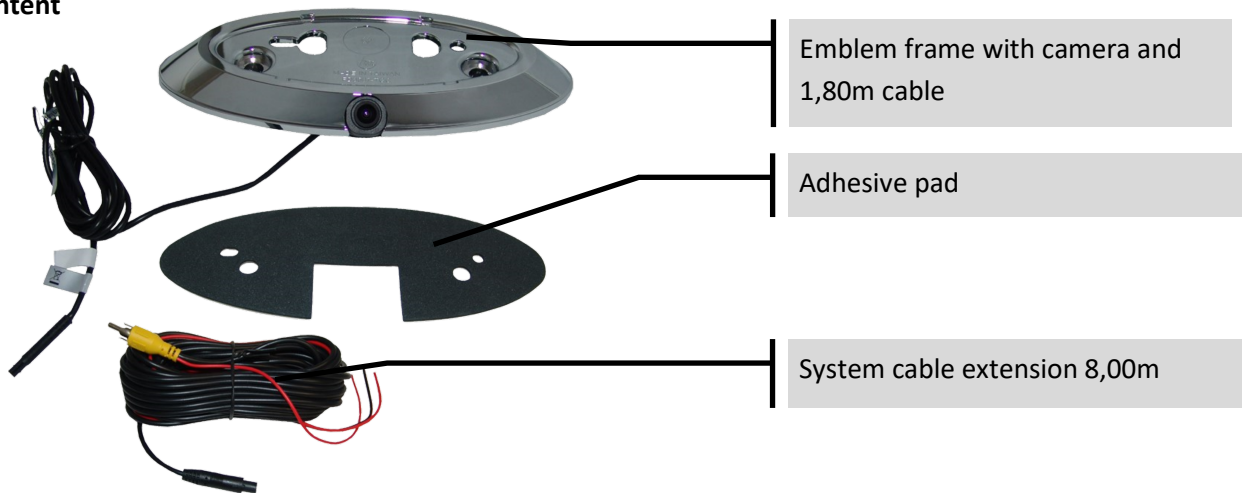

Product features

- 1/3inch CMOS NTSC sensor (PC3089)
- Resolution 720 x 480 pixel (700 TV-lines)
- 0.1 Lux min illumination
- F1.2 aperture
- Angle horizontal 160°
- Mirrored image (fixed)
- Parking guide lines, optional disengageable
- Protection class IP69
- Exchange emblem frame and camera
- 1.8m Camera-cable with 4pin-BM system-female connector (diameter 5mm)
- 8m Extension cable (4pin-BM)
- Betriebstemperaturbereich -20°C bis +70°C
- Dimensions overall 230 x 90 x 37mm (WxHxD)
- Hole spacing 119mm
- Operating voltage 12V DC (6-16V)
- Current consumption 40mA
- Power consumption 0.5W

Installation

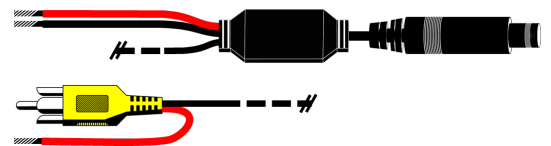

! Red wire is connected through - connect only one end and isolate the other!

- Video signal
- +12V Reverse signal
- Ground

Camera not suitable for permanent operation!

Note: If the camera is powered by reverse signal we recommend to install a relay between power supply of reverse signal and power supply of the camera to ensure a stable and uninterrupted power supply and avoid unwanted errors in the board computer.

In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.

Camera-configuration

(Cut green cable loop if required)

With guide lines

Without guide lines

Do not cut!

Attention: The original Ford emblem of the vehicle doesn't fit in the frame of the camera. The emblem with the dimensions approx. 160 x 55mm is suitable. The matching Ford emblem with the order number 5354548 must be ordered additionally from Ford!



10R-05 14176

