

D CLASS PREMIUM AMPLIFIER FPX 5.1200

MODE 5/4/3 CHANNELS - POWERFUL AND COMPACT

- High performance compact heat dissipation chassis




- 4 channels + 1 dedicated subwoofer channel

- Audio Mos-Fets - Optimized efficiency.

KEY POINTS

- D Class amplifier - 5 output channels
- Stable under 2 ohms
- High power and dynamic reserve (1 200W max.)
- Audio Mos-Fets - Optimized efficiency
- Subwoofer remote control supplied

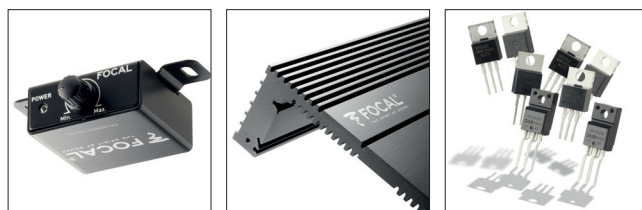

TECHNICAL SPECIFICATIONS

Class D amplifier - 5/4/3 channels

CEA power (4 ohms):

4 x 75Wrms + 1 x 420Wrms

Power max (2 ohms):

4 x 120Wrms + 1 x 720Wrms

Power max (channels 1 to 4 bridged at 4 ohms)

+ channel 5 at 2 ohms: 2 x 240Wrms + 720Wrms

Bandwidth: 10Hz - 20kHz

Total harmonic distortion: < 0.03%

SNR (1W/A): > 75 dB

High-Pass / Low-Pass filters channels 1 to 4:

50Hz - 500Hz

Channel 5 (Subwoofer): Subsonic filter

(High-pass) 10Hz - 50Hz +

Low-pass filter 50Hz - 250Hz

Channel 5 Bass-Boost : 45Hz / 0 to 12dB

Phase adjustable from 0 to 180° for channel 5

Copy mode: (6 CH/4 CH/2 CH)

Full range mode

Protection: Short circuit / low impedance / reverse polarity / DC / power drop / heat protection

Dimensions (L x H x W): 13^{17/64}" x 2^{1/4}" x 6^{57/64}"
(337 x 175 x 57mm)

Weight: 9 lbs (4,1kg)

 **Performance**
CREATE YOUR SOUND

 **FOCAL**
THE SPIRIT OF SOUND