


D CLASS PREMIUM AMPLIFIER FPX 5.1200

MODE 5/4/3 CHANNELS
Powerful and compact



- D Class amplifier - 5 output channels
- Copy mode: 6/4/2 inputs
- Stable under 2 ohms
- High power and current dynamic reserve (1 200W max.)
- Audio Mos-Fets - Optimized efficiency
- Subwoofer remote control supplied

MECHANICAL DRAWING

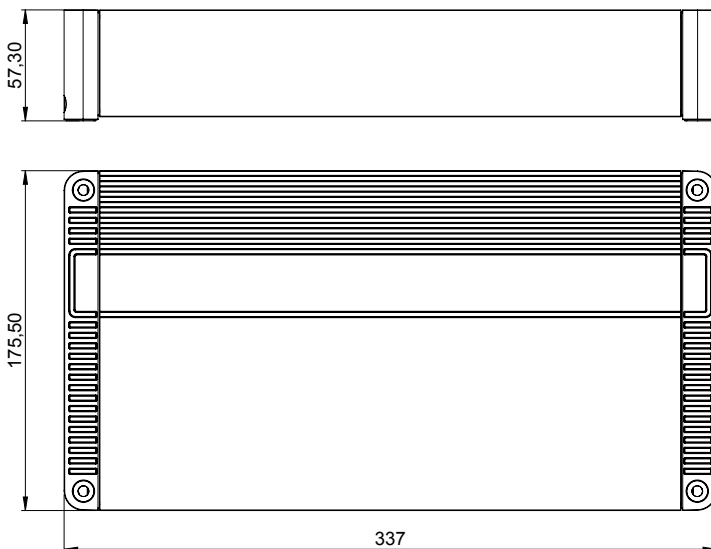

SPECIFICATIONS

AUDIO SPECIFICATIONS	
CEA power (4 ohms)	4x75 Wrms + 1x420Wrms
Max. power (2 ohms)	4x120Wrms + 1x720Wrms
Power max (channels 1 to 4 bridged at 4 ohms) + channel 5 at 2 ohms	2x240Wrms + 1x720Wrms
Bandwidth (-3dB)	10Hz - 20kHz
THD	0.03%
SNR (1W/A)	> 75dB
GENERAL FEATURES	
Subsonic filter	10Hz-50Hz (24dB/oct)
High-pass/low-pass filter	50Hz - 500Hz
Bass boost	0 to 12dB linear
Phase	0 to 180° linear
Full-range function	✓
Mirror mode	✓
Standby current (A)	1,7
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	13 ^{17/64} "x6 ^{57/64} "x2 ^{1/4} " (337x175x57mm)
Weight (kg)	9lbs (4.1kg)
Operating voltage range	8.3 to 16V

Performance
CREATE YOUR SOUND

FOCAL