

ACCESS TN43


Tweeter TN43



SPECIFICATIONS

Nominal power	15W	
Maximum power	100W	
Sensitivity (2,83V/1m)	94dB	
Cone	Aluminium	
Surround	-	
Nom. impedance	4 Ohms	
DC resistance	3.7 Ohms	
VC diameter	20mm	0 ^{13/16} "
VC height	-	
Former	Kapton	
Layers	2	
Wire	Copper	
Inductance	-	
Xmax	-	
Magnet d x h	-	
Magnet weight	-	
Flux density	1.35T	
Gap height	2.5mm	0 ^{1/8} "
Net weight	60g	0.12 lbs

FREQUENCY RESPONSE/IMPEDANCE

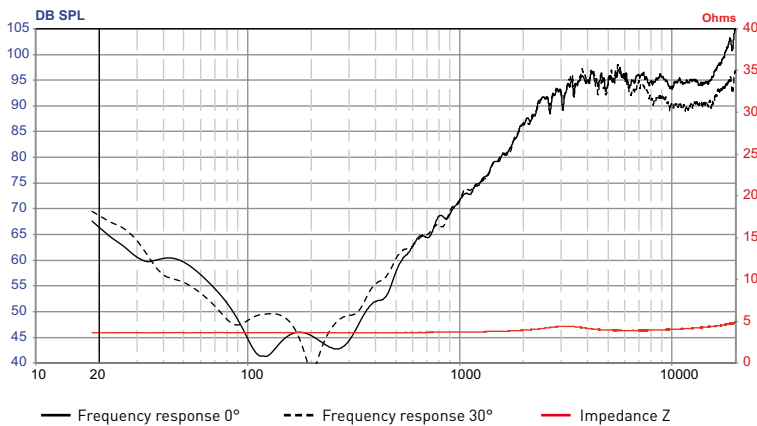

MECHANICAL DRAWING

