


Vehicle-specific camera

VSC-E-AU16

Delivery content

Connection cable
0,40m

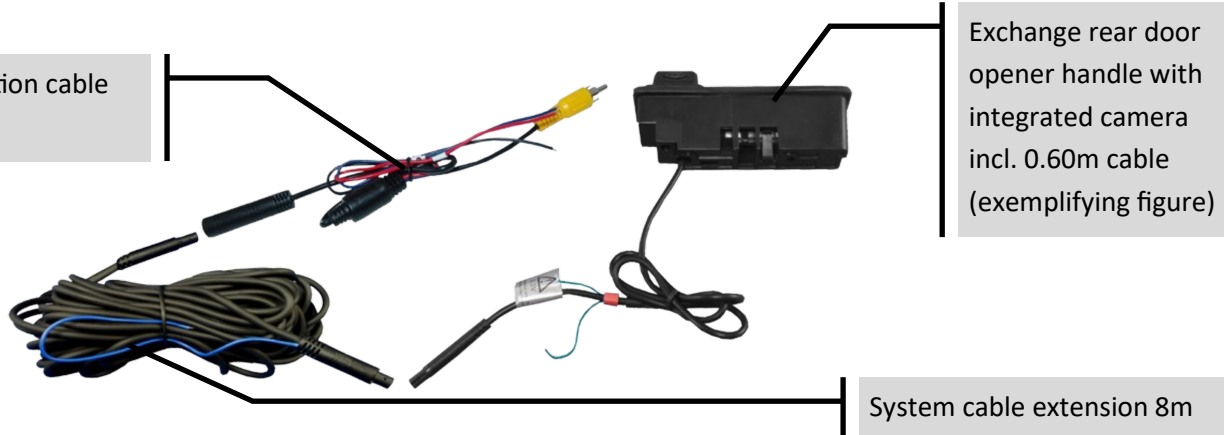

System cable extension 8m

Product features

- Sensor type CMOS 1/4" HD low-light sensitive sensor
- Picture format NTSC
- Resolution 800TVL
- Min illumination 0.01 Lux
- Angle h=140°, v=105°, d=180°
- Mirrored image (fixed)
- Parking guide lines, optional switchable
- System cable with throughput, e.g. for reverse signal
- Protection class IP69K
- Camera colour black
- Total cable length 9m
- Video connector RCA male connector
- System connector camera 4pin 3V
- Diameter camera connector 5mm
- Operating voltage +12V DC (6 ~ 16V)
- Current consumption 50mAh
- Power consumption 0.6W
- Operating temperature range -30°C to +75°C
- Storage temperature range -40°C to +80°C

Tip for dealers:

Inform your end customers that the rear-view camera mustn't be cleaned by steam cleaner!

Installation



- Video signal
- +12V Reverse signal
- Throughput
- Ground

Camera not suitable for permanent operation!

Note: If the camera is powered by reverse signal we recommend to install a relay between power supply of reverse signal and power supply of the camera to ensure a stable and uninterrupted power supply and avoid unwanted errors in the board computer.

Camera configuration

(Cut green cable loop if required)

With guide lines



Without guide lines



In case the isolation of the camera is harmed in the moisture section close to the camera, it is mandatory to repair the isolation. Otherwise the camera will inevitably become moist inside sooner or later.



03 12699

