

## **TV-Free**

**Video-in-motion Interface**

## **TF-MIB**

**Compatible with  
Audi, Volkswagen and Skoda  
with  
MIB navigation systems**

**Porsche with PCM4 navigation system**

### **Legal Information**

By law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. This product should only be used while standing or to display fixed menus or rear-view-camera video when the vehicle is moving, for example the MP3 menu for DVD upgrades.

Changes/updates of the vehicle's software can cause malfunctions of the interface. We offer free software-updates for our interfaces for one year after purchase. To receive a free update, the interface must be sent in at own cost. Labor cost for and other expenses involved with the software-updates will not be refunded.

## Contents

### 1. Prior to installation

- 1.1. Delivery contents
- 1.2. Check compatibility of vehicle and accessories
- 1.3. Setting the Dip-switches of the CAN-Box TV-500
  - 1.3.1. Exception: Vehicles with affected navigation performance
- 1.4. Pin-assignments

### 2. Installation

### 3. Activation of the video-in-motion function

### 4. Specifications

### 5. Technical support

## 1. Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources.

### 1.1. Delivery contents

*Take down the SW-version and HW-version of the interface boxes, and store this manual for support purposes.*

CAN-box TV-500  
HW\_\_\_\_\_ SW\_\_\_\_\_



Harness  
TV-VAG01

## 1.2. Check compatibility of vehicle and accessories

### Requirements

<i>Vehicle</i>	Audi, VW, Skoda, Porsche
<i>Navigation</i>	Audi MMI Navigation plus with MMI touch 7" and MMI Navigation plus with MMI touch response 10,1", Skoda Columbus MIB, VW MIB Discover Pro, Porsche PCM4

### Limitations

On some vehicles the navigation will not work while the video-in-motion function is active. This can only be detected by a test drive with built-in TV-free!

## 1.3. Setting the Dip-switches of the Can-Box TV-500

Audi, Skoda, VW	Dip 1	Dip 2	Dip 3	Dip 4	Dip 5	Dip 6
Video-in-motion permanent	ON	OFF	OFF	OFF	ON	ON
Video-in-motion selective*	OFF	OFF	OFF	OFF	ON	ON

Porsche	Dip 1	Dip 2	Dip 3	Dip 4	Dip 5	Dip 6
Video-in-motion permanent	ON	OFF	OFF	OFF	OFF	OFF
Video-in-motion selective*	OFF	OFF	OFF	OFF	OFF	OFF

\* With dip1 to OFF the included green cable is used to activate the video-in-motion function.

**Note:** Dip switch functions of the TV-500

Dip 1 – activation TV-free

Dip 2 – no function

Dip 3 – no function

Dip 4 – no function

Dip 5 – CAN-bus termination resistor on the vehicle side

Dip 6 – CAN-bus termination resistor on the head-unit side

### 1.3.1. Exception: Vehicles with affected navigation performance


On some vehicles the navigation performance is affected as long as the video-in-motion function is activated. This can only be detected by a test drive with built-in TV-free with Dip 1 to ON!

If the navigation performance is affected you have to set Dip 1 to OFF. As long as the video-in-motion function is activated, the navigation will NOT be working! The included green cable is used to activate the video-in-motion function (Video-in-motion selective).

## 1.4. Pin-assignments

Cable colour	Assignment
● Red	+12V permanent Pin 18
● Brown	Ground Pin 17
● Orange/Violet	CAN HIGH Pin 6
● Orange/Brown	CAN LOW Pin 12

**No liability for vehicle wire colors and pin definition!**  
**Possible changes by the vehicle manufacturer. The given information must be verified by the installer.**

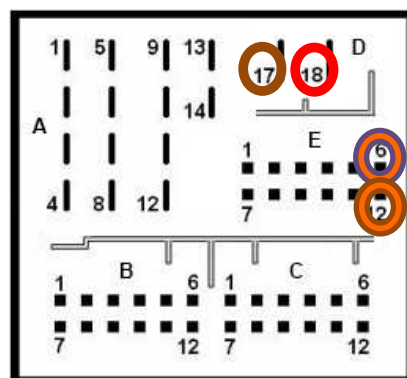

### Pin-assignment of the CAN-Box TV-500 (Molex 8pin)

Cable colour	Pin-No.	Assignment
● Yellow	Pin 4	CAN-HIGH – connection to the head-unit
● Blue	Pin 3	CAN-LOW – connection to the head-unit
● Yellow/Black	Pin 8	CAN-HIGH – connection to the vehicle
● Blue/Black	Pin 7	CAN-LOW – connection to the vehicle
● Red	Pin 1	+12V permanent
● Black	Pin 5	Ground
● Green	Pin 6	Activation of the video-in-motion function (+12V = TV-free activated)
● White	Pin 2	Trigger output (+12V DC 500mA)

## 2. Installation

**Switch off ignition and disconnect the vehicle's battery! If according to factory rules disconnecting the battery has to be avoided, it is usually sufficient to put the vehicle in sleep-mode. In case the sleep-mode does not show success, disconnect the battery with a resistor lead.**

### 3. Activation of the video-in-motion function

The video-in-motion can be activated and deactivated by Dip 1 or alternatively by the included loose green cable in connection with a switch (not included in delivery).

#### Video-in-motion permanent

With dip1 to ON the video-in-motion function is activated permanently without disturbing the navigation performance.

#### Video-in-motion selective

With dip1 to OFF the included green cable is used to activate the video-in-motion function.


Connect a switch to the green cable and connect the green cable to +12V ACC.

- +12V = TV-Free is activated
- 0V = TV-Free is not activated

**Note:** The loose white cable is not required and must be isolated.

### 4. Specifications

Operation voltage	10.5 – 14.8V
Stand-by power drain	<2mA
Operation power drain	~60mA
Power consumption	~0,08W
Temperature range	-30°C to +80°C
Weight	44g
Measurements (box only) W x H x D	76 x 27 x 54 mm



### 5. Technical Support

**CAS GmbH**  
***manufacturer/distribution***  
In den Fuchslöchern 3  
D-67240 Bobenheim-Roxheim

email [support@casgermany.com](mailto:support@casgermany.com)

**Legal disclaimer:** Mentioned company and trademarks, as well as product names/codes are registered trademarks ® of their corresponding legal owners.