

## v.LiNK Video inserter

### VL3-R40-E

Compatible with  
Chevrolet and Opel vehicles with R4.0 IntelliLink  
and 7 Zoll monitor with separated radio box



example

**ATTENTION: Connecting this interface by mistake to a Navi900 IntelliLink with 8" monitor can cause damage. Make sure that your system is a radio R4.0 IntelliLink with 7" monitor.**

Video-inserter for one rear-view camera  
and two additional video inputs

#### Product features

- Video-inserter for factory-infotainment systems
- CVBS Input for one rear-view camera
- 2 CVBS Video-inputs for after-market Video sources (e.g. DVD-Player, DVB-T Tuner)
- Automatic switching to rear-view camera input on engagement of the reverse gear
- Activatable parking guide lines for rear-view camera (not available for all vehicles)
- Video-in-motion (ONLY for connected video-sources)
- Video-inputs NTSC and PAL compatible

## Contents

### 1. Prior to installation

- 1.1. Delivery contents
- 1.2. Checking the compatibility of vehicle and accessories
- 1.3. Boxes and connectors – video interface
- 1.4. Settings of the 8 Dip switches (black)
  - 1.4.1. Enabling the interface's video inputs (dip 2-3)
  - 1.4.2. Rear-view camera setting (dip 5)
- 1.5. Settings of the 4 Dip switches (CAN function – red)

### 2. Installation

- 2.1. Place of installation
- 2.2. Connection schema
- 2.3. Connection to factory head unit and monitor
  - 2.3.1. Connection to the picture signal cable –
  - 2.3.2. Connection – Power / CAN
- 2.4. Analog power supply for the video interface
- 2.5. Connection of video-sources
  - 2.5.1. Audio insertion
  - 2.5.2. After-market rear-view camera
    - 2.5.2.1. Case 1: Interface receives the reverse gear signal
    - 2.5.2.2. Case 2: Interface does not receive the reverse gear signal
- 2.6. Connecting video-interface and external keypad
- 2.7. Picture settings and guide lines

### 3. Interface operation

- 3.1. By factory infotainment button
- 3.2. By external keypad

### 4. Specifications

### 5. FAQ – Trouble Shooting-Interface functions

### 6. Technical support

## Legal Information

By law, watching moving pictures while driving is prohibited, the driver must not be distracted. We do not accept any liability for material damage or personal injury resulting, directly or indirectly, from installation or operation of this product. Apart from using this product in an unmoved vehicle, it should only be used to display fixed menus or rear-view-camera video when the vehicle is moving (for example the MP3 menu for DVD upgrades).

Changes/updates of the vehicle's software can cause malfunctions of the interface. Up to one year after purchase we offer free software-updates for our interfaces. To receive a free update, the interface has to be sent in at own cost. Wages for de-and reinstallation and other expenditures involved with the software-updates will not be refunded.

## 1. Prior to installation

Read the manual prior to installation. Technical knowledge is necessary for installation. The video interface's place of installation must be free of moisture and away from heat sources.

**Before the final installation in the vehicle of the video sources, we recommend a test-run to ensure the compatibility of vehicle and interface. Due to changes in the production of the vehicle manufacturer there's always a possibility of incompatibility.**

### 1.1. Delivery contents




*Take down the serial number of the interface and store this manual for support purposes: \_\_\_\_\_*

## 1.2. Checking the compatibility of vehicle and accessories

| Requirements                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                        |                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
| Brand                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Compatible vehicles                                                                                    | Compatible systems                                     |
| <b>Chevrolet</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Camaro model years since 2016                                                                          | R4.0 IntelliLink<br>7" monitor with separate radio-box |
| <b>Land Rover</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Astra K (Sports Tourer and 5-door) since model year 2016-<br>Insignia B since model year 2017-<br>Karl | R4.0 IntelliLink<br>7" monitor with separate radio-box |
| <b>Limitations:</b><br><i>Video only</i> <p>The interface inserts ONLY video signals into the infotainment. For inserting Audio signals either the possibly existing factory audio-AUX-input or a FM-modulator can be used. If 2 audio sources shall be connected to the infotainment, an additional electronic is necessary to switch them.</p> <i>Factory rear-view camera</i> <p>Automatically switching-back from inserted video to factory rear-view camera is only possible while the reverse gear is engaged. To delay the switch-back an additional electronic part is required.</p> |                                                                                                        |                                                        |

### 1.3. Boxes and connectors – video interface

The video-interface converts the connected after-market sources video signals into a LVDS signal which is inserted in the factory monitor using separate trigger options. Further it reads the vehicle's digital signals out of the vehicle's CAN-bus and converts them for the video interface.

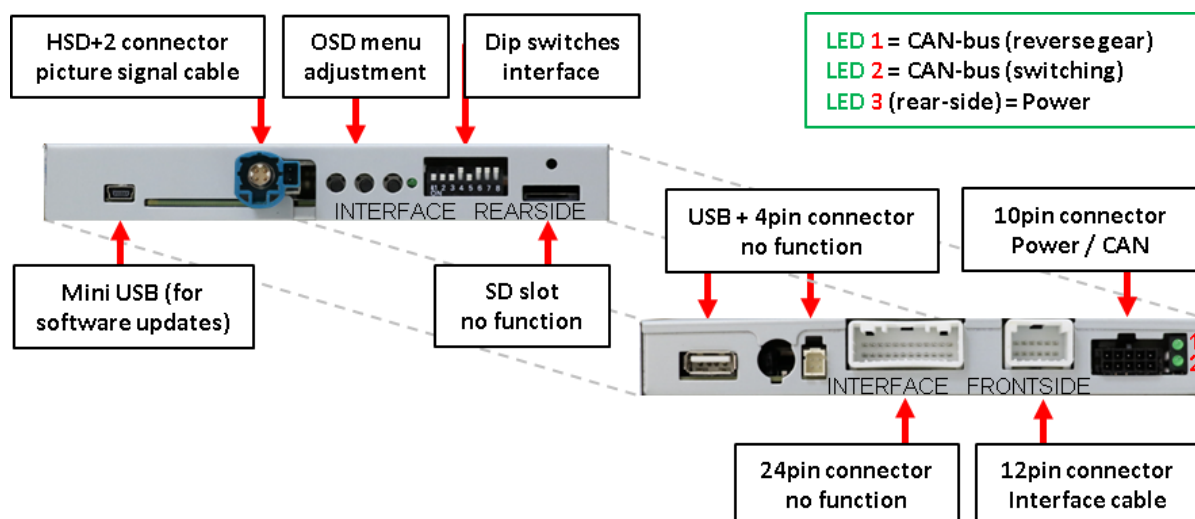

### 1.4. Settings of the 8 Dip switches (black)

Some settings have to be selected by the dip-switches on the video interface. Dip position down is ON and position up is OFF.



| Dip | Function                    | ON (down)    | OFF (up)        |
|-----|-----------------------------|--------------|-----------------|
| 1   | No function                 |              | set to OFF      |
| 2   | CVBS Video 1-input          | enabled      | disabled        |
| 3   | CVBS Video 2-input          | enabled      | disabled        |
| 4   | No function                 |              | set to OFF      |
| 5   | Rear-view cam type          | after-market | factory or none |
| 6   | No function                 |              | set to OFF      |
| 7   | Vertical picture mirroring* | Enabled*     | Disabled*       |
| 8   | No function                 |              | set to OFF      |

\*The vertical picture mirror function has been added with software 25-180227/GD-171204/2000HC-180227.

See the following chapters for detailed information.

**After each Dip-switch-change a power-reset of the Can-box has to be performed!**

### 1.4.1. Enabling the interface's video inputs (dip 2-3)

Only by dip switches enabled video inputs can be accessed by switching through the interface's video sources. It is recommended to enable only the required inputs. Disabled inputs will be skipped while switching through the video interfaces inputs.

### 1.4.2. Rear-view camera setting (dip5)

If set to OFF, the interface switches to factory picture while the reverse gear is engaged to display factory rear-view camera or factory optical park system picture.

If set to ON, the interface switches to its rear-view camera input while the reverse gear is engaged.

### 1.4.3. Vertical picture mirroring (dip7)

Dip 7 adjusts a vertical mirroring of the inserted videos on the monitor. If the monitor representation of inserted videos should be shown 180° twisted, the setting for dip7 has to be ON.

**Note:** Dip 1, 4, 6, and 8 are out of function and have to be set to **OFF!**

## 1.5. Settings of the 4 Dip switches (CAN functions – red)

Dip position down is ON and position up is OFF.

| Navigation / System | Dip 1 | Dip 2 | Dip 3 | Dip 4 |
|---------------------|-------|-------|-------|-------|
| Alle Fahrzeuge      | OFF   | OFF   | OFF   | OFF   |



**For all vehicles set all 4 dip switches to OFF (down).**

**After each Dip-switch-change a power-reset has to be performed!**

## 2. Installation

**To install the interface, first switch off the ignition and disconnect the vehicle's battery. Please read the owner's manual of the car, regarding the battery's disconnection! If required, enable the car's Sleep-mode (hibernation mode)**

**In case the sleep-mode does not succeed, the disconnection of the battery can be done with a resistor lead.**

**If the necessary stabilized power supply for the interface is not taken directly from the battery, the chosen connection has to be checked for being constantly stabile.**

**The interface needs a permanent 12V source!**


Before a final installation, we recommend a test-run to ensure the compatibility of the vehicle and the interface. Due to changes in the production of the vehicle manufacturer there's always a possibility of incompatibility.

### 2.1. Place of installation

The interface is supposed to be installed at a suitable location behind the vehicle's head-unit.

**Head unit of Astra K and Insignia B: Down the A-pillar behind the glove department!**


## 2.2. Connection schema

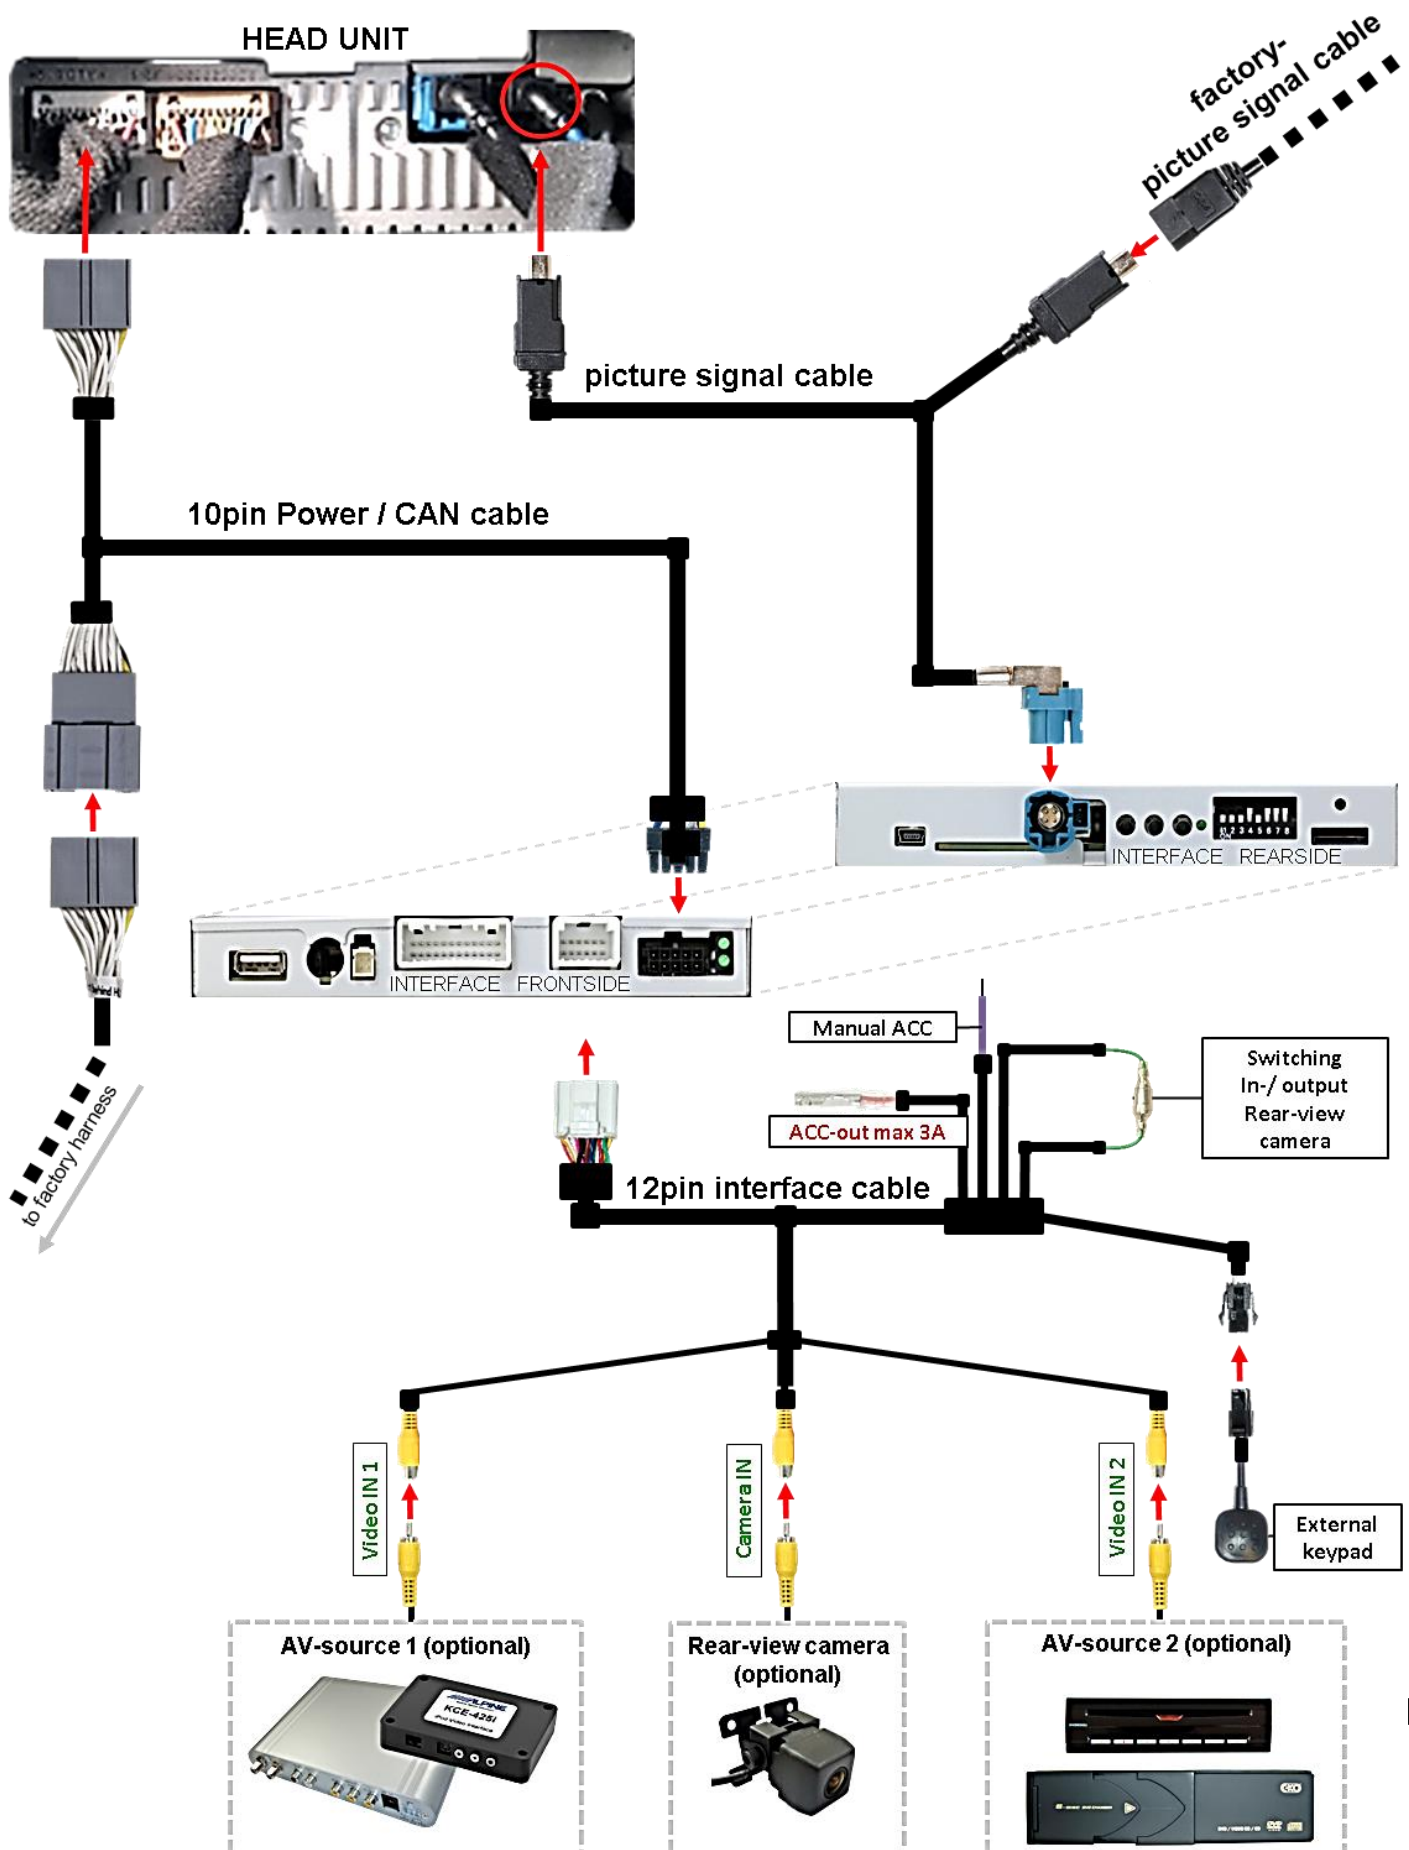

## 2.3. Connections to factory head-unit and monitor


### Remove the factory head unit

#### 2.3.1. Connection to the picture signal cable

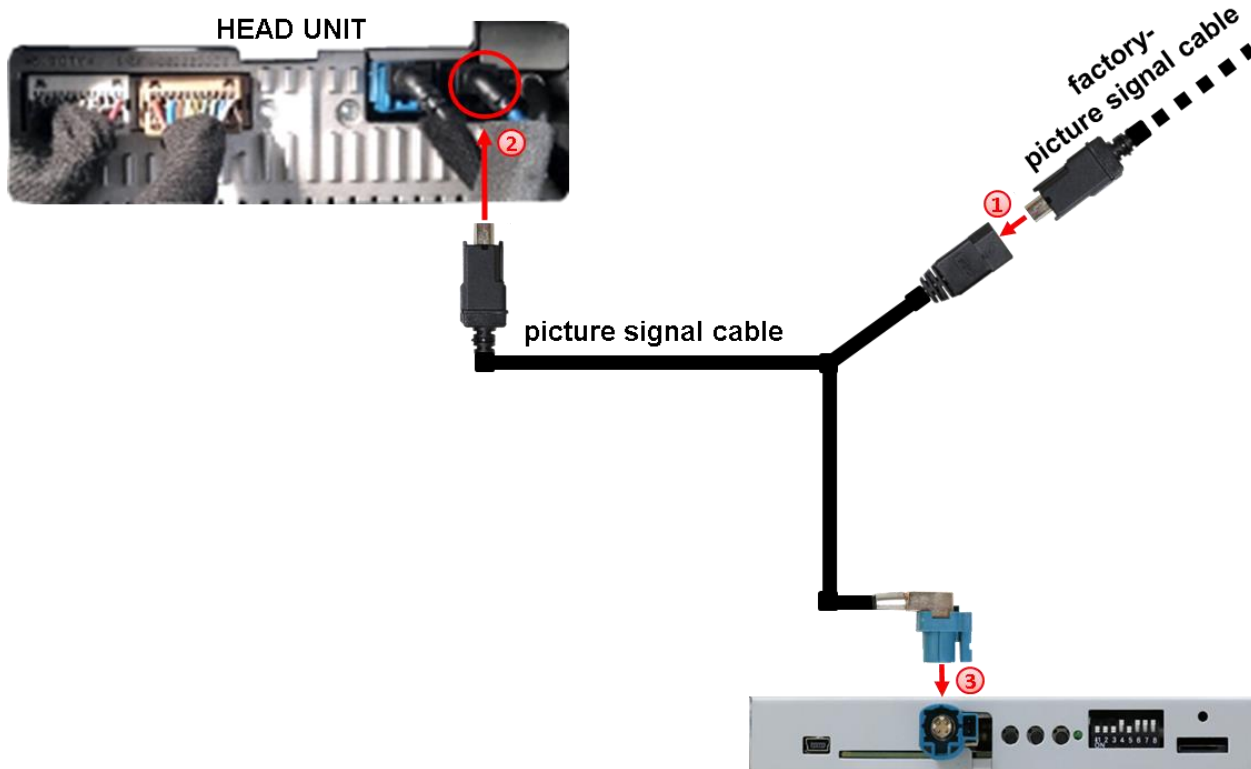

- 1 Disconnect the factory picture signal cable's female USB connector with the blue coloured cable from the rear-side of the head unit and connect it to the black coloured male USB connector of the enclosed picture signal cable.
- 2 Connect the opposite black coloured female connector of the enclosed picture signal cable to the previously become free male HSD+2 connector of the video interface.
- 3 Connect the female waterblue coloured HSD+2 connector of the picture signal cable to the waterblue coloured male HSD+2 connector of the video interface.

## 2.3.2. Connection - Power / CAN

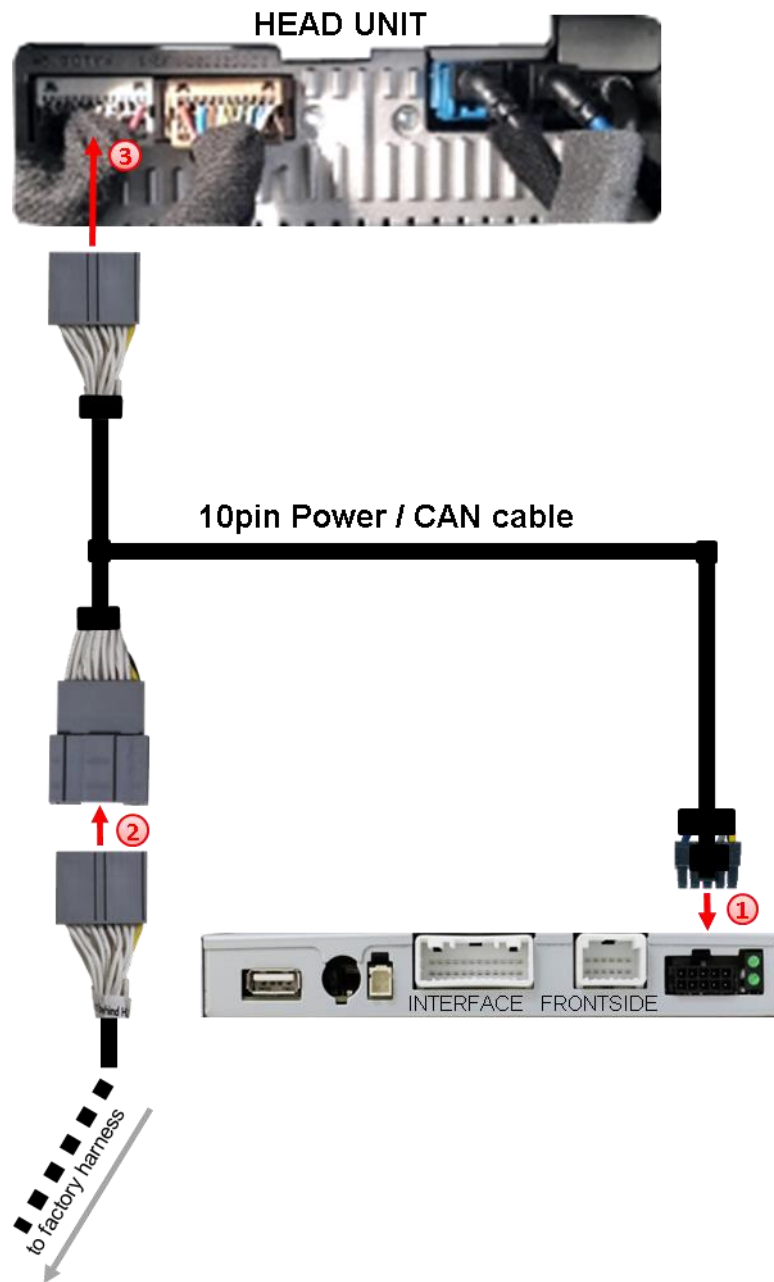


- 1 Connect the female 10pin connector of the 10pin Power / CAN cable to the 10pin connector of the video interface.
- 2 Remove the female 20pin connector of the vehicle harness from the rear-side of the head-unit and connect it to the male 20pin connector of the Power / CAN cable.
- 3 Connect the opposite female 20pin connector of the Power / CAN cable to the previously become free male 20pin connector at the rear-side of the head unit.



Note: If, after connecting the 10pin Power / CAN cable, no interface LED lightens up while the ignition is turned on, refer to chapter "Analogue power supply for the video interface".

## 2.4. Analog power supply for the video interface

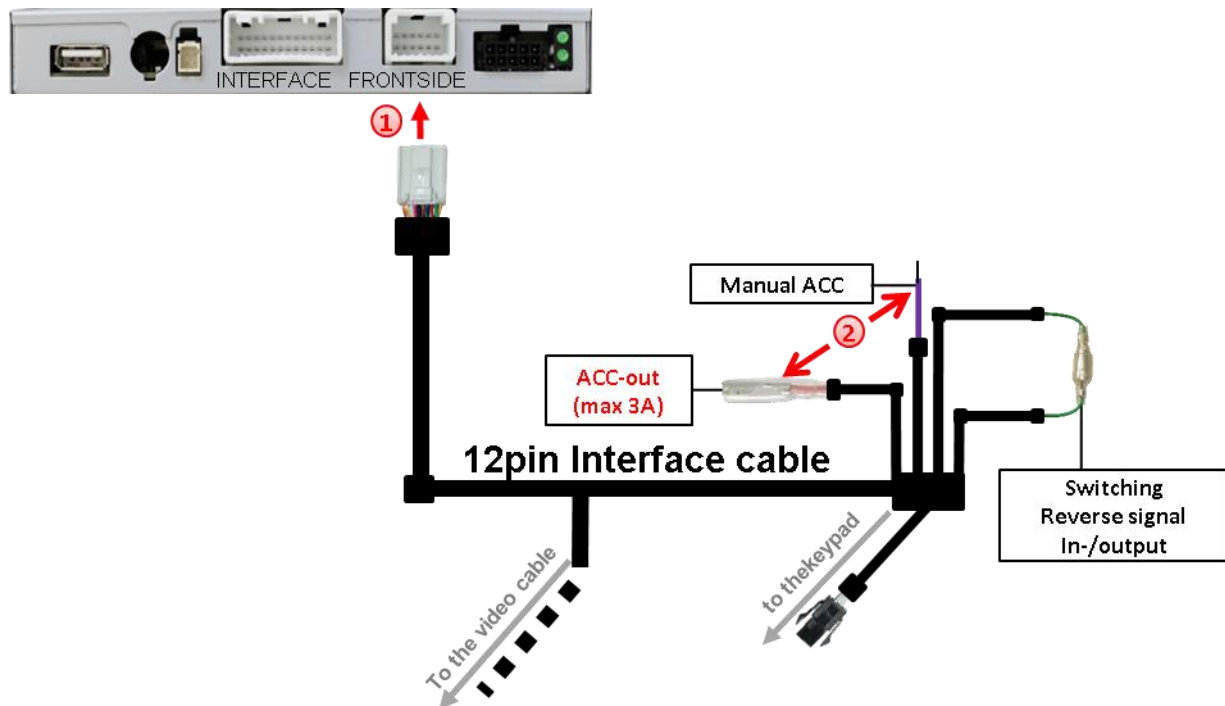


- ① Connect the female 12pin connector of the 12pin interface cable to the male 12pin connector of the video interface.
- ② If, after connecting the PNP harness, no interface LED lightens up while the ignition is turned on, the single red wire **ACC-out (max 3A)** and the purple coloured wire **Manual ACC** of the 12pin interface cable both have to be connected additionally to **S-contact terminal 86s +12V** (e.g. glove compartment illumination).

## 2.5. Connecting video sources

It is possible to connect an after-market rear-view camera and two more Video sources to the video-interface.

Before a final installation of the video sources, we recommend a test-run to ensure the compatibility of vehicle and interface. Due to changes in the production of the vehicle manufacturer there's always a possibility of incompatibility.

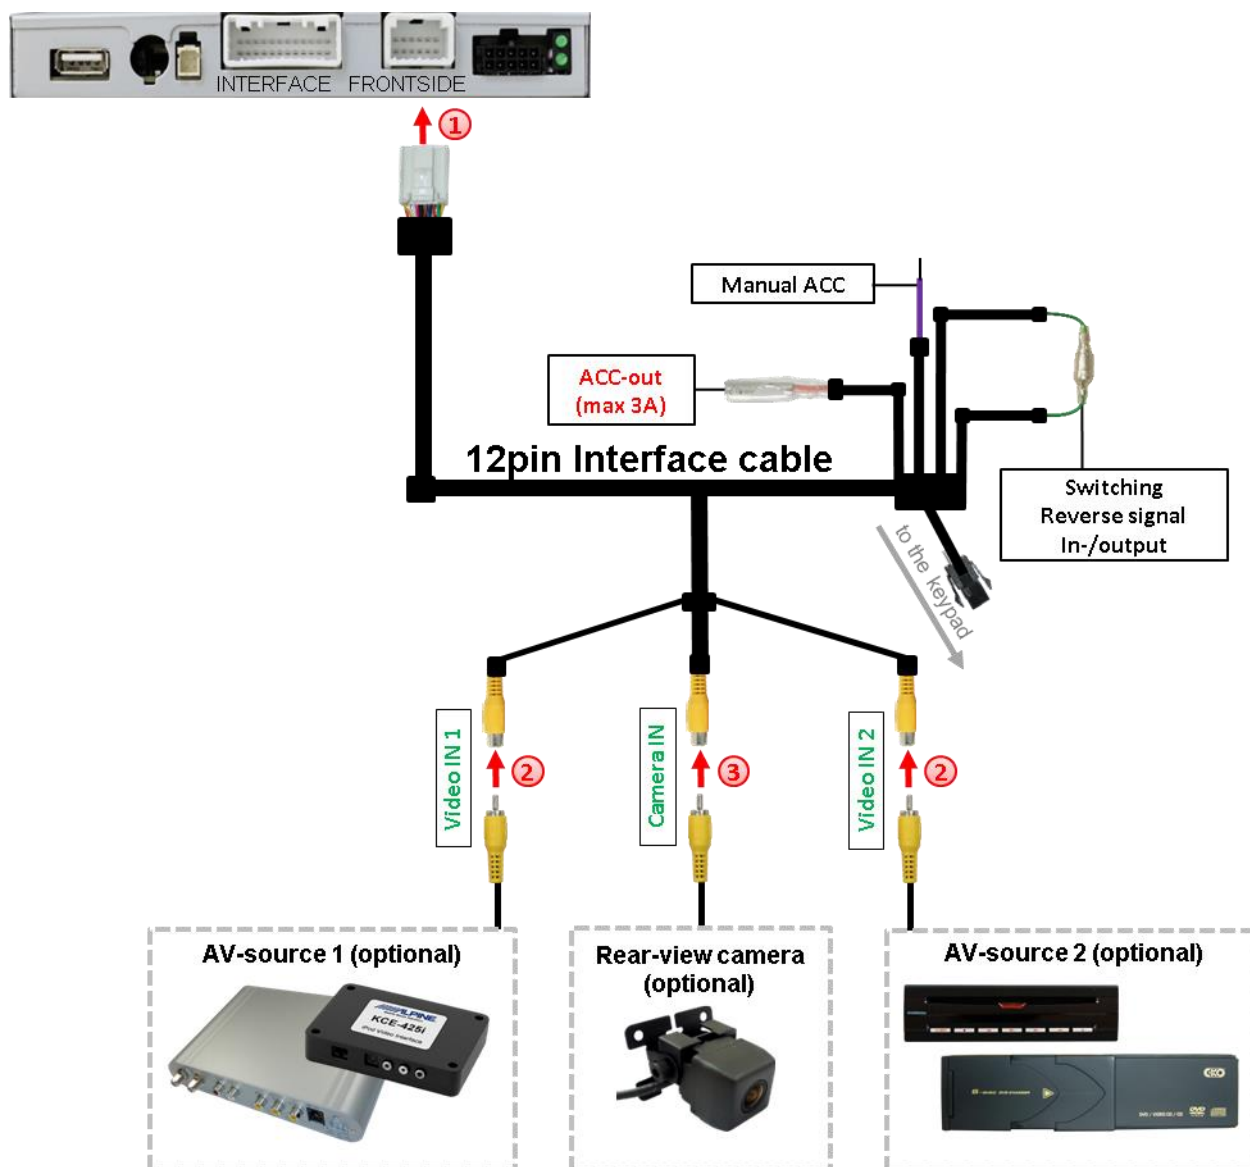

- ① Connect the female 12pin connector of the 12pin interface cable to the male 12pin connector of the video-interface.
- ② Connect the video RCA of the video source 1 and 2 to the female RCA connector "Video IN1" and "Video IN 2" of the 12pin interface cable.
- ③ Connect the video RCA of the Rear-view camera to the female RCA connector "Camera IN" of the 12pin interface cable.

### 2.5.1. Audio-insertion

This interface is only able to insert video signals into the factory infotainment. If an AV-source is connected, the audio insertion has to be done by the factory audio AUX input or an FM-modulator. The inserted video-signal can be activated simultaneously to each audio-mode of the factory infotainment. If 2 AV sources shall be connected to the infotainment, additional electronic is necessary to switch the audio signals.


### 2.5.2. After-market rear-view camera

Some vehicles have a different reverse gear code on the CAN-bus which the video-interface is not compatible with. Therefore, there are two different ways of installation. If the video interface receives a signal of the reverse gear, the green wire **"Reverse-OUT"** of the 12pin cable should carry +12V while the reverse gear is engaged.

**Note:** Do not forget to set video interface's dip5 to ON before testing.

#### 2.5.2.1. Case 1: Interface receives the reverse gear signal


If the interface delivers +12V on the green output wire of the 12pin interface cable while reverse gear is engaged, the video interface will automatically switch to the rear-view camera input **"Camera IN"** while the reverse gear is engaged.

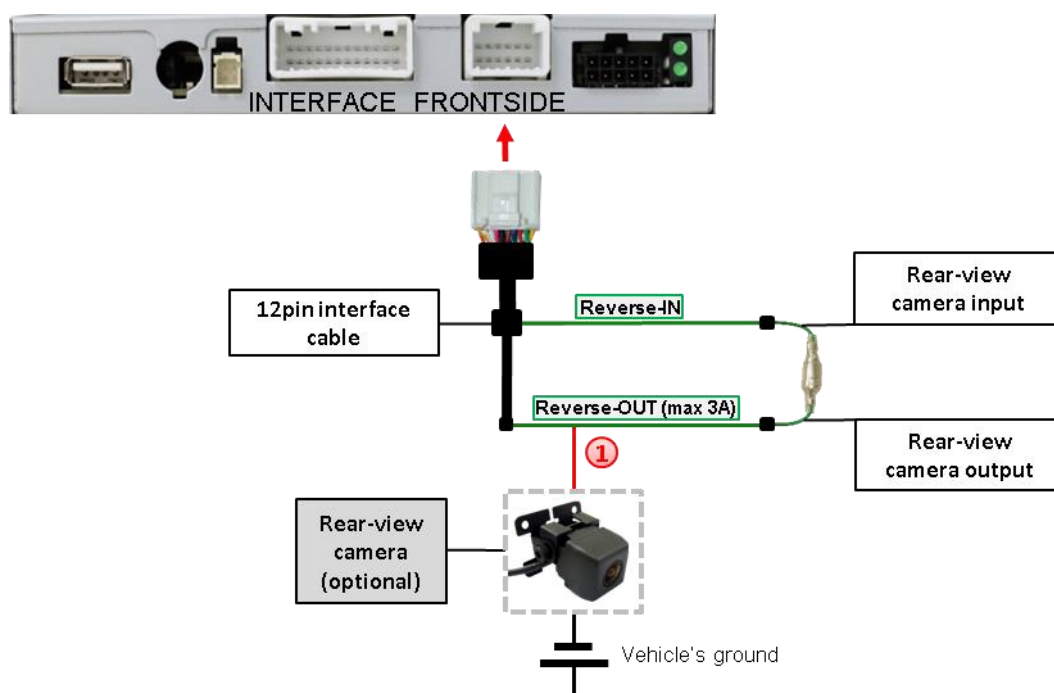

- ① Additionally, the +12V (max. 3A) power supply for the rear-view camera can be taken from the green wire of the 12pin interface cable.

### 2.5.2.2. Case 2: CAN-box does not receive the reverse gear signal

If the video interface does not deliver +12V on the green wire of the 12pin cable when reverse gear is engaged (not all vehicles are compatible), an external switching signal from the reverse gear light is required. As the reverse gear light's power supply isn't voltage-stable all the time, an ordinary open relay (e.g. AC-RW-1230 with wiring AC-RS5) or filter (e.g. AC-PNF-RVC) is required. The diagram below shows the connection type of the relay.

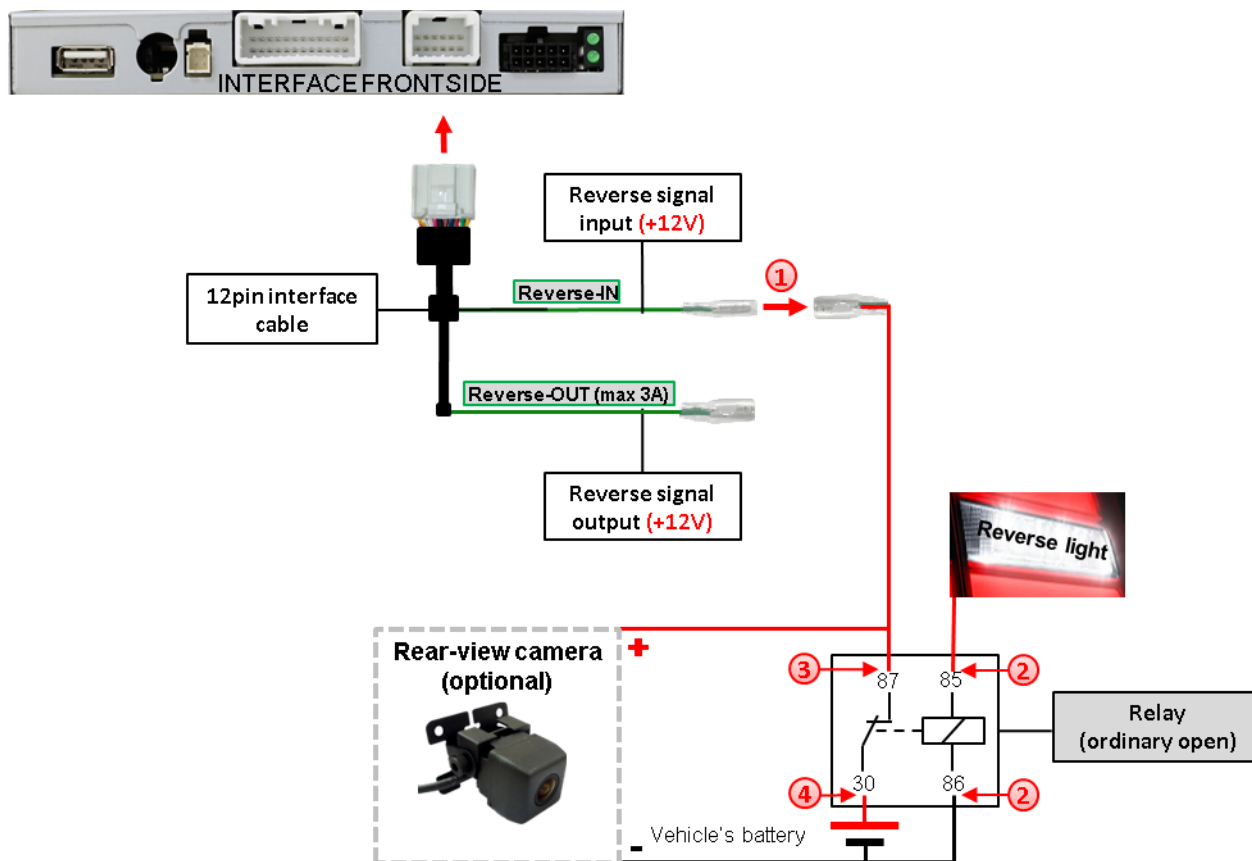


- 1 Disconnect the green cable's preconnected male- and female connectors of the 12pin interface cable and connect the green input cable "Reverse-IN" to the output connector (87) of the relay.

**Note:** Last but not least to avoid short circuits, the best solution should be, to crimp a male 4mm connector to the relay's output cable and connect it to the green cable's female 4mm connector. The output-cable "Reverse-OUT" remains disconnected as it's out of function.

- 2 Connect the Reverse light's power-cable to coil (85) and the vehicle's ground to coil (86) of the relay.
- 3 Connect the output connector (87) of the relay to the rear-view camera's power-cable, like you did it to the green "Reverse-IN" cable before.
- 4 Connect stable and permanent +12V to the relay's input connector (30).


## 2.6. Connecting video-interface and external keypad

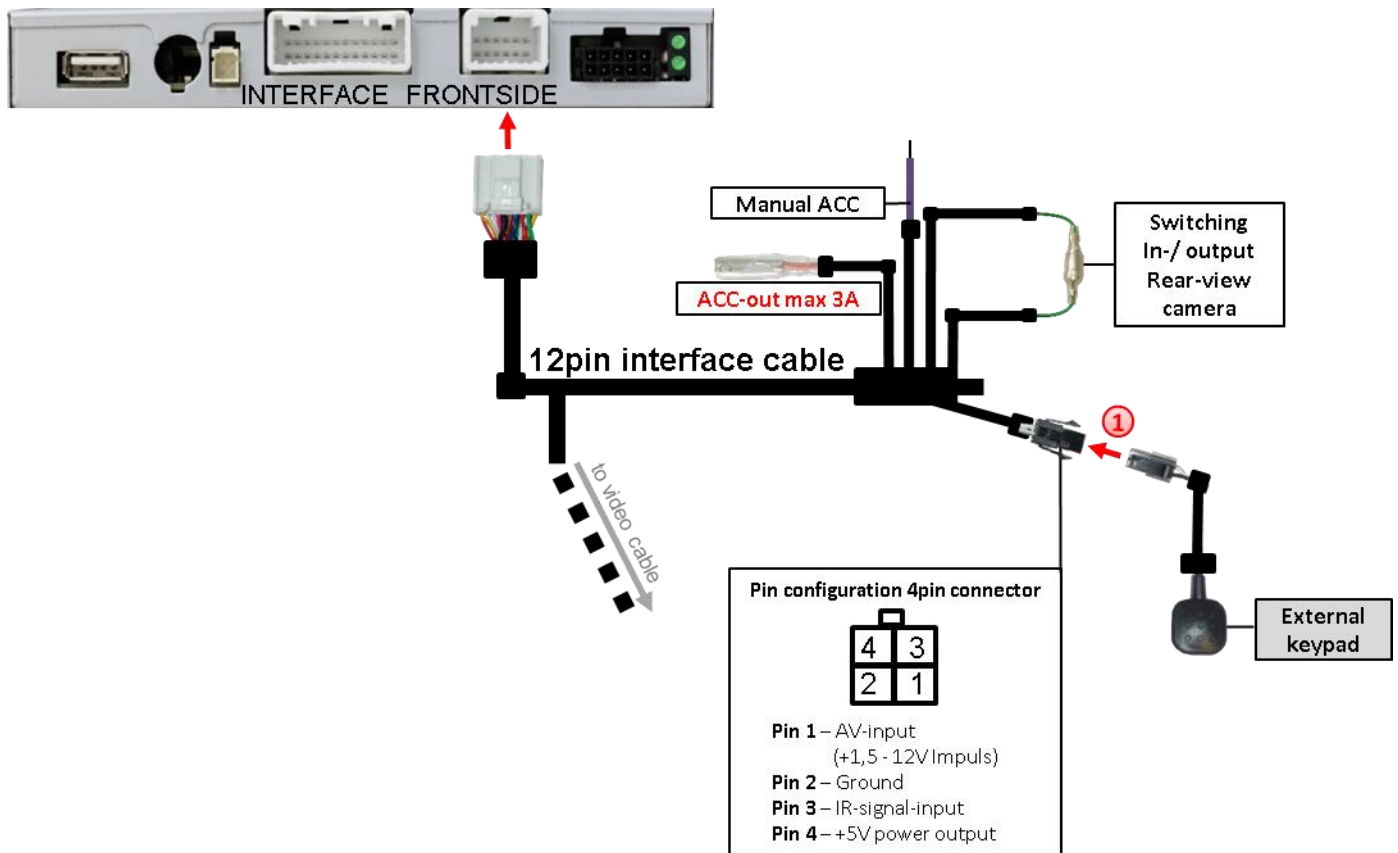

- 1 Connect the female 4pin connector of the keypad to the male 4pin connector of the 12pin interface cable.

**Note:** Even if switching through several video sources by the keypad mightn't be required, the invisible connection and availability is strongly recommended.

## 2.7. Picture settings and guide lines

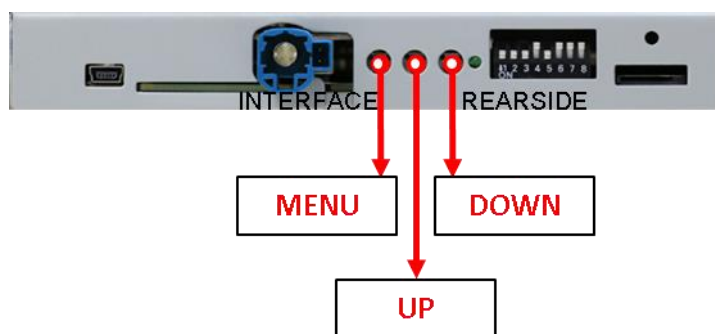


The picture settings are adjustable by the 3 push-buttons at the rear-side of the video-interface. Press the MENU button to open the OSD settings menu or to switch to the next menu item. Press UP and DOWN to change the selected value. The buttons are placed inside in the housing to avoid accidental changes during or after the installation. Picture settings must be done separately for AV1 and AV2 while the corresponding input is selected and visible on the monitor.

**Note:** The OSD menu is only shown when a working video source is connected to the selected video-input of the interface.

The following settings are available:

- Contrast
- Brightness
- Saturation
- Position H (horizontal)
- Position V (vertical)
- IR-AV1/2 (no function)
- Guide L/R (no function)
- UI-CNTRL (guide lines ON/OFF) -
- Size H/V (picture size horizontal/vertical)

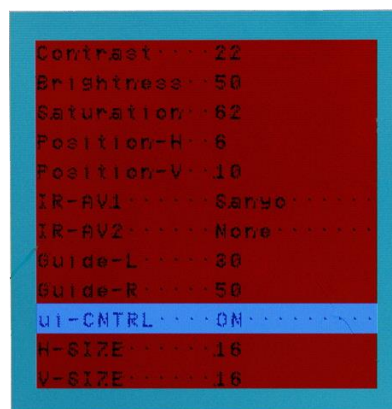

### **Note:**


To adjust the reverse picture, engage the reverse gear.

To adjust the guide lines, move the steering wheel to see the changes.

If there is no communication between interface and the vehicle's CAN-bus (several vehicles aren't compatible), the reverse gear guide-lines can't be shown during the vehicle's operation, even if they once appear after having switched the system to powerless!

### 3. Interface operation

#### 3.1. By factory infotainment button

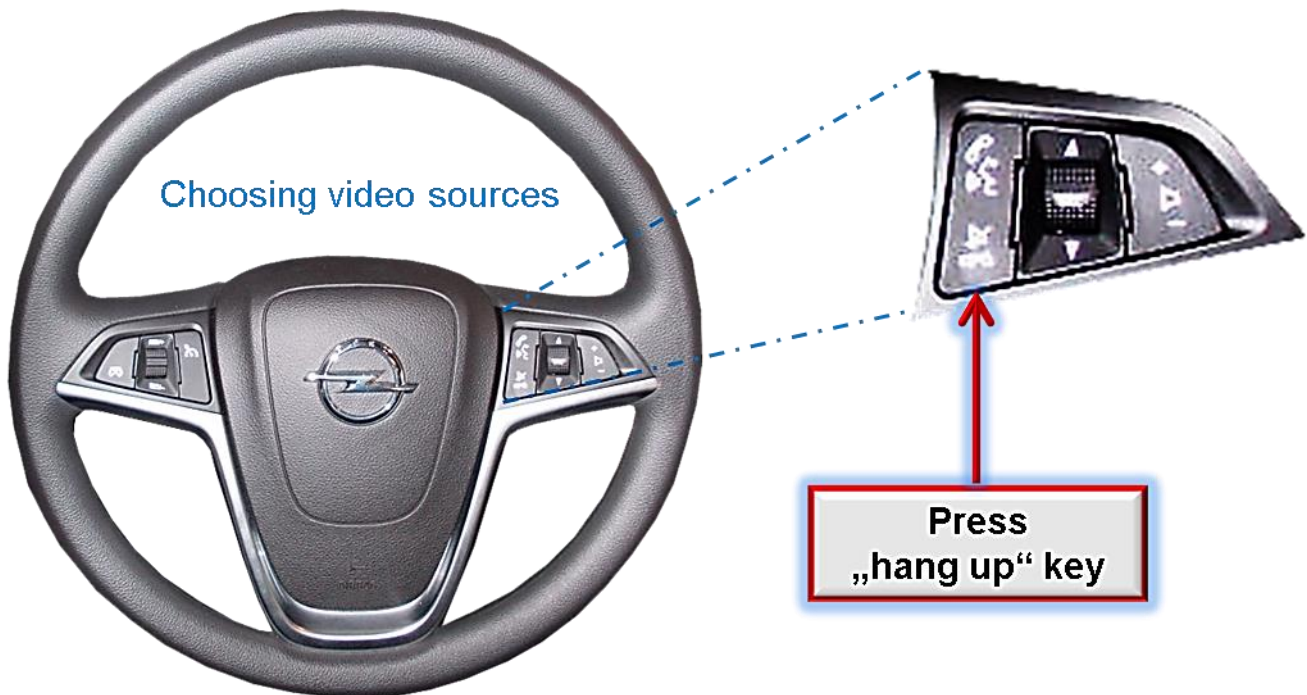

To switch the interface's activated video sources, the factory infotainment buttons can be used.

Press the according infotainment button to switch the input from the factory video to the inserted video sources. If all inputs are activated by dip switch settings, the order is the following:

*Factory video → Video IN 1 → Video IN 2 → factory video*

Each press will switch to the next enabled input. Inputs which are not enabled will be skipped.

**Switchover by vehicle buttons isn't possible in all vehicles. In some vehicles the external keypad has to be used.**

#### 3.2. By keypad

Alternatively or additionally to the factory infotainment buttons, the interface's external keypad can be used to switch the enabled inputs.

**Note:** Even if not needed, the keypad should always remain connected to the video interface for support purposes.

#### 4. Specifications

|                      |                               |
|----------------------|-------------------------------|
| BATT/ACC range       | 7V - 25V                      |
| Stand-by power drain | 25mA                          |
| Power                | 180mA @12V                    |
| Video input          | 0.7V - 1V                     |
| Video input formats  | NTSC                          |
| Temperature range    | -40°C to +85°C                |
| Dimensions video-box | 160 x 23 x 112 mm (W x H x D) |

## 5. FAQ – Trouble shooting Interface functions

For any troubles which may occur, check the following table for a solution before requesting support from your vendor.

| Symptom                                                                              | Reason                                                                                                | Possible solution                                                                                                                                                                   |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| No picture/black picture (factory picture).                                          | Not all connectors have been reconnected to factory head-unit or monitor after installation.          | Connect missing connectors.                                                                                                                                                         |
|                                                                                      | No power on CAN-bus box (all LED CAN-bus box are off).                                                | Check power supply of CAN-bus box. Check CAN-bus connection of CAN-bus box.                                                                                                         |
|                                                                                      | CAN-bus box connected to CAN-bus in wrong place.                                                      | Refer to the manual where to connected to the CAN-bus. If not mentioned, try another place to connect to the CAN-bus.                                                               |
|                                                                                      | No power on video-interface (all LED video-interface are off).                                        | Check whether CAN-bus box delivers +12V ACC on red wire output of 8pin to 6pin cable. If not cut wire and supply ACC +12V directly to video-interface.                              |
| No picture/black picture/white picture (inserted picture) but factory picture is OK. | No picture from video source.                                                                         | Check on other monitor whether video source is OK.                                                                                                                                  |
|                                                                                      | No video-source connected to the selected interface input.                                            | Check settings dips 1 to 3 of video interface which inputs are activated and switch to corresponding input(s).                                                                      |
|                                                                                      | LVDS cables plugged in wrong place.                                                                   | Double-check whether order of LVDS cables is exactly connected according to manual. Plugging into head-unit does not work when the manual says to plug into monitor and vice versa. |
|                                                                                      |                                                                                                       |                                                                                                                                                                                     |
| Inserted picture totally wrong size or position.                                     | Wrong monitor settings of video-interface.                                                            | Try different combinations of dips 7 and 8 of video-interface. Unplug 6pin power after each change.                                                                                 |
| Inserted picture double or 4 times on monitor.                                       |                                                                                                       |                                                                                                                                                                                     |
| Inserted picture distorted, flickering or running vertically.                        | Video sources output set to AUTO or MULTI which causes a conflict with the interfaces auto detection. | Set video source output fixed to PAL or NTSC. It is best to set all video sources to the same standard.                                                                             |
|                                                                                      | If error occurs only after source switching: Connected sources are not set to the same TV standard.   | Set all video sources to the same standard.                                                                                                                                         |
|                                                                                      | Some interfaces can only handle NTSC input.                                                           | Check manual whether there is a limitation to NTSC mentioned. If yes, set source fixed to NTSC output.                                                                              |
| Inserted picture b/w.                                                                |                                                                                                       |                                                                                                                                                                                     |
| Inserted picture qual. bad.                                                          | Picture settings have not been adjusted.                                                              | Use the 3 buttons and the interface's OSD to adjust the picture settings for the corresponding video input.                                                                         |
| Inserted picture size slightly wrong.                                                |                                                                                                       |                                                                                                                                                                                     |
| Inserted picture position wrong.                                                     |                                                                                                       |                                                                                                                                                                                     |
| Camera input picture flickers.                                                       | Camera is being tested under fluorescent light which shines directly into the camera.                 | Test camera under natural light outside the garage.                                                                                                                                 |
| Camera input picture is bluish.                                                      | Protection sticker not removed from camera lens.                                                      | Remove protection sticker from lens.                                                                                                                                                |


| Symptom                                                                 | Reason                                                                      | Possible solution                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Camera input picture black.                                             | Camera power taken directly from reverse gear lamp.                         | Use relay or electronics to "clean" reverse gear lamp power. Alternatively, if CAN-bus box is compatible with the vehicle, camera power can be taken from green wire of 6pin to 8pin cable.                                        |
| Camera input picture has distortion.                                    |                                                                             |                                                                                                                                                                                                                                    |
| Camera input picture settings cannot be adjusted.                       | Camera input picture settings can only be adjusted in AV2 mode.             | Set dip 3 of video-interface to ON (if not input AV2 is not already activated) and connect the camera to AV2. Switch to AV2 and adjust settings. Reconnect camera to camera input and deactivate AV2 if not used for other source. |
| Graphics of a car in camera input picture.                              | Function PDC is ON in the interface OSD.                                    | In compatible vehicles, the graphics will display the factory PDC distance. If not working or not wanted, set interface OSD menu item UI-CNTRL to ALLOFF.                                                                          |
| Chinese signs in camera input picture                                   | Function RET or ALL is ON (function for Asian market) in the interface OSD. | Set interface OSD menu item UI-CNTRL to ALLOFF or PDCON.                                                                                                                                                                           |
| Not possible to switch video sources by OEM button.                     | CAN-bus interface does not support this function for vehicle.               | Use external keypad or cut white wire of 6pin to 8pin cable and apply +12V impulses for AV-switching.                                                                                                                              |
| Not possible to switch video sources by external keypad.                | Pressed too short.                                                          | For video source switching a longer press of about 2.5 seconds is required.                                                                                                                                                        |
|                                                                         | SW-version of interface does not support external keypad.                   | Use OEM-button or cut white wire of 6pin to 8pin cable and apply +12V impulses for AV-switching.                                                                                                                                   |
| Interface does not switch to camera input when reverse gear is engaged. | CAN-bus interface does not support this function for the vehicles.          | Cut the green wire of the 6pin to 8pin cable and apply +12V constant from reverse gear-lamp signal. Use relay to "clean" R-gear lamp power.                                                                                        |
| Interface switches video-sources by itself.                             | CAN-bus interface compatibility to vehicle is limited.                      | Cut the grey wire of 6pin to 8pin and isolate both ends. If problem still occurs, additionally cut the white wire of 6pin to 8pin cable and isolate both ends.                                                                     |

## 6. Technical Support

Please note that direct technical support is only available for products purchased directly from NavLinkz GmbH. For products bought from other sources, contact your vendor for technical support.

**NavLinkz GmbH**  
**distribution/tech dealer-support**  
Eurotec-Ring 39  
D-47445 Moers

Tel +49 2841 949970  
Email mail@navlinkz.de



Made in China

